

Food Grade Applications

Advanced Air System Technology™




These special Food Grade certified powder-coated filters are excellent for wash down environments, which is typical in the food processing and dairy industries. The powder coating itself is non-toxic.

The filters meet the requirements of 21 CFR 110, while the coating ingredients meet at least one section of FDA Title 21, with the exception of food items containing 8+% alcohol.

Note: Consult the factory for other filter combinations not shown below or for any special application questions.


Single Stage Unit



Eliminizer: For Water and Dirt Removal (& Oil in Combo)

Model #	Description	A	B	C	D
3P-060-F03-Fi	Metal Bowl, Float Drain w/Indicator	3.8	11.5	3.8	2.0
3P-060-F03-DCi	Metal Bowl, Float Drain w/Indicator	8.0	11.5	3.8	2.0
3P-060-F04-Fi	Metal Bowl, Float Drain w/Indicator	3.8	11.5	3.8	2.0
3P-060-F04-DCi	Metal Bowl, Float Drain w/Indicator	8.0	11.5	3.8	2.0
3P-090-F06-Fi	Metal Bowl, Float Drain w/Indicator	4.6	19.0	4.6	2.4
3P-090-F06-DCi	Metal Bowl, Float Drain w/Indicator	10.0	19.0	4.6	2.4
3P-150-F08-Fi	Metal Bowl, Float Drain w/Indicator	4.6	19.0	4.6	2.4
3P-150-F08-DCi	Metal Bowl, Float Drain w/Indicator	10.0	19.0	4.6	2.4

Combo Unit

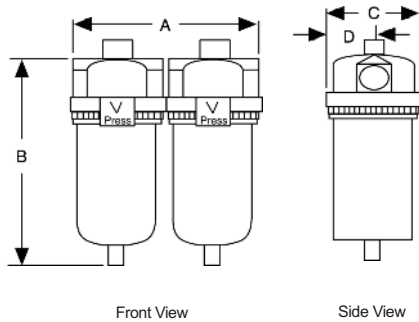

Coalescer: For Light Water, Light Dirt and Oil

Model #	Description	A	B	C	D
3C-061-F03-Fi	Metal Bowl, Float Drain w/Indicator	3.8	11.5	3.8	2.0
3C-061-F03-P	Metal Bowl, Manual Drain	3.8	10.0	3.8	2.0
3C-061-F04-Fi	Metal Bowl, Float Drain w/Indicator	3.8	11.5	3.8	2.0
3C-061-F04-P	Metal Bowl, Manual Drain	3.8	10.0	3.8	2.0
3C-091-F06-Fi	Metal Bowl, Float Drain w/Indicator	4.6	19.0	4.6	2.4
3C-091-F06-P	Metal Bowl, Manual Drain	4.6	16.8	4.6	2.4
3C-151-F08-Fi	Metal Bowl, Float Drain w/Indicator	4.6	19.0	4.6	2.4
3C-151-F08-P	Metal Bowl, Manual Drain	4.6	16.8	4.6	2.4

Specifications:

Port Sizes	3/8", 1/2", 3/4", 1"
Port Type	NPT
Flow Capacity	60,90,150 SCFM @ 100 PSI
Housing Type	FDA Powder-Coated Aluminum
Maximum Temp. & Pressure	Auto Drain & Ind.:125°F, 150 PSIG Man. Drain, No Ind.:150°F, 200 PSIG
Filter Capacity	3P: 1.0 micron, 3C: 0.01 micron 4P: 1.0 micron

Oil Extractor: For Water, Dirt, & Oil

Model #	Description	A	B	C	D
4P-061-F03-DCi	Metal Bowl, Float Drain w/Indicator	8.0	11.5	3.8	2.0
4P-061-F04-DCi	Metal Bowl, Float Drain w/Indicator	8.0	11.5	3.8	2.0
4P-090-F06-DCi	Metal Bowl, Float Drain w/Indicator	10.0	19.0	4.6	2.4
4P-150-F08-DCi	Metal Bowl, Float Drain w/Indicator	10.0	19.0	4.6	2.4



Reading Technologies, Inc.
Advanced Air System Technology™

1031F MacArthur Road Reading, PA 19605
1 800-521-9200 Fax 610 372-1984
Website <http://www.driair.com>